


Pneumatic 23-Spindle Line Boring Machine



Optional Hinge Boring Attachment
2 minute change over, available in two common hole patterns.

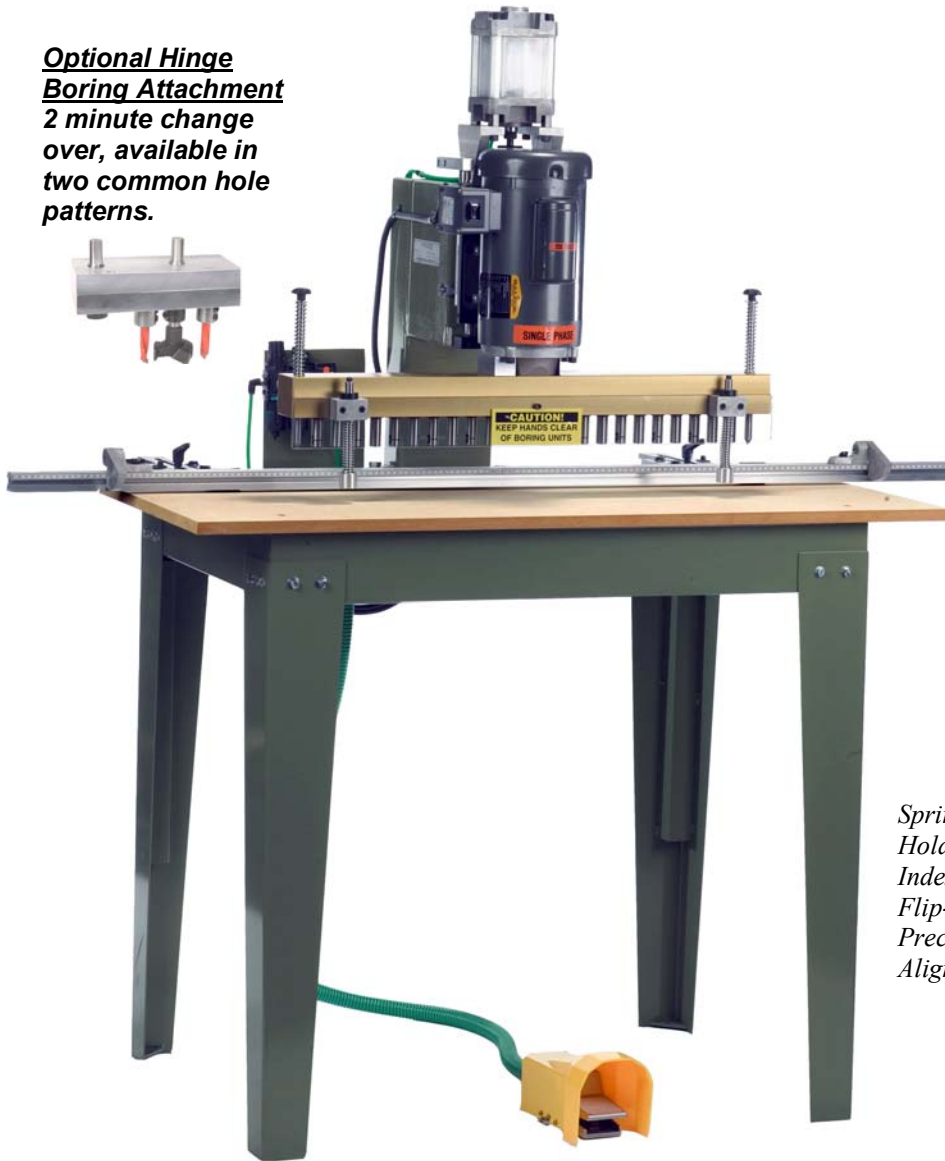

- Pneumatic Operation for Fast Cycle Times.
- 64" Fence Capacity with 2 Flip Stops.
- Down Stroke Operation for Easy Viewing.
- 12" Throat Opening (capacity to drill from edge of board).
- 3,450 rpm TEFC BALDOR Motor.
- *Optional Additional Fence Capacity & Flip Stops.*

Spring Loaded Hold Downs, Index Pins, Flip-Stops & Precision Fence Alignment.



STANDARD FEATURES & SPECIFICATIONS

- 2 flip stops.
- 64" fence capacity.
- 2 Spring loaded index pins.
- 2 Spring loaded hold downs.
- Pneumatic foot pedal operation.
- Motor turns off when pedal released.
- 32 millimeter centers, distance between first and last drill = 27.7".

One Year Warranty On Workmanship & Manufacturing

- 23-spindle boring head with heat treated steel helical gears.
- Baldor motor, 3,450 rpm, 2hp – 220 volt (11.5 amps) 60 Hz Single Phase.
- Accepts 10 millimeter flat shank bits, 12 Lefts & 11 Rights.
- *Machine weight (approx.) 420 lbs, crated 470 lbs.*

Distributed www.reardonmachinery.com

SHOW ROOM: 24577 Redfish Street - Bonita Springs, FL 34134

Reardon's
WOODWORKING MACHINERY

239-947-0348 Phone
888-842-9455 Toll Free
239-498-1809 Fax

Manufactured By:
CONQUEST
INDUSTRIES