


13-Spindle "Standard" Line Boring Machine



Optional Hinge Boring Attachment
2 minute change over, available in two common hole patterns.

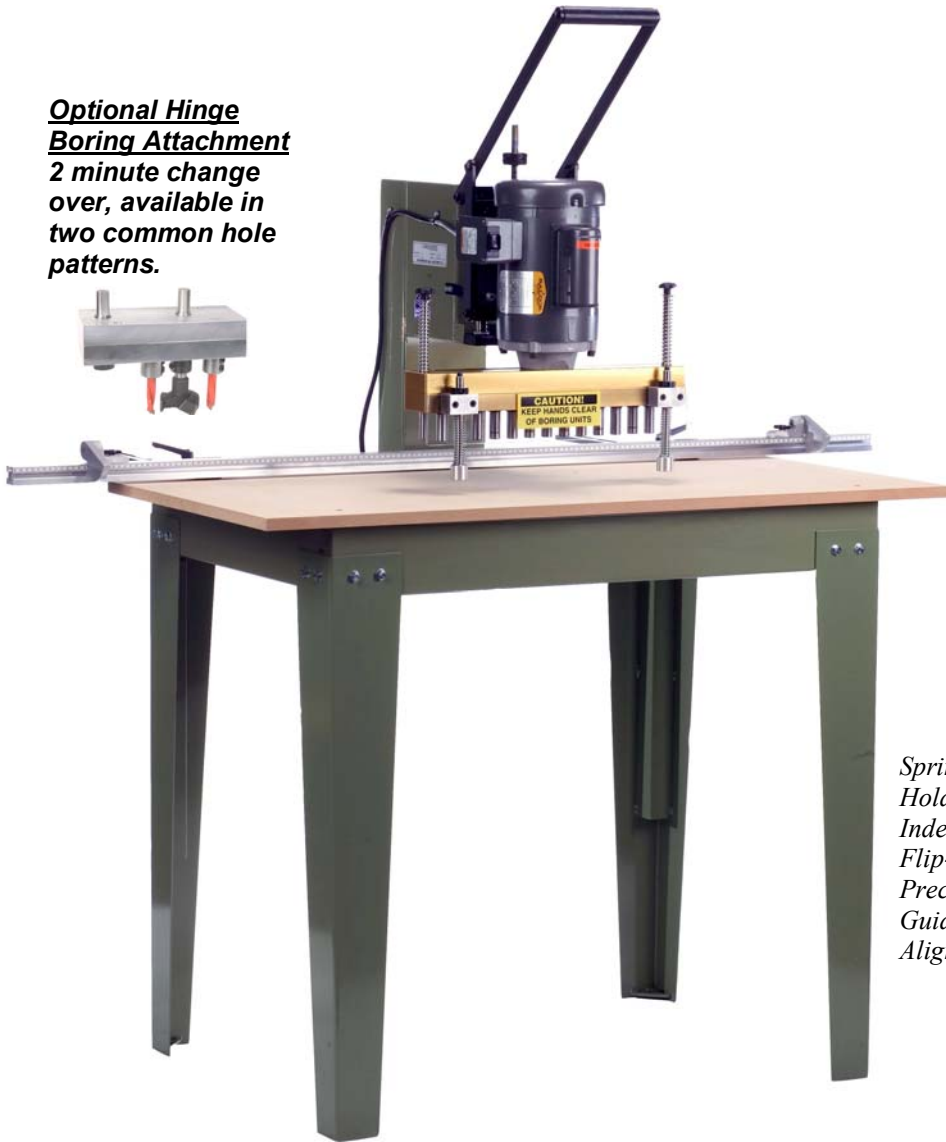

- 64" Fence Capacity with 2 Flip Stops.
- Down Stroke Operation for Easy Viewing.
- 12" Throat Opening (capacity to drill from edge of board).
- 3,450 rpm TEFC BALDOR Motor (*cleaner holes & easier drilling than 1,700 rpm machines.*)
- *Optional* Pneumatic Operation.
- *Optional* Additional Fence Capacity & Flip stops.

Spring Loaded Hold Downs, Index Pins, Flip-Stops & Precision "Roller Guided" Fence Alignment.



STANDARD FEATURES & SPECIFICATIONS

- 2 flip stops.
- 64" fence capacity.
- 2 Spring loaded index pins.
- 2 Spring loaded hold downs.
- 32 millimeter centers, distance between first and last drill = 15".
- 13-spindle boring head with heat treated steel helical gears.

One Year Warranty On Workmanship & Manufacturing

- Baldor motor, 3,450 rpm, 2hp – 115/230 volt (11.8 / 5.9 amps) 60 Hz Single Phase.
- *Optional* Pneumatic Operation, (turns off when pedal released, adjustable drilling speed).
- Accepts 10 millimeter flat shank bits, 6 Lefts & 7 Rights.
- *Machine weight (approx.) 380 lbs, crated 430 lbs. Pneumatic 440 lbs.*

Distributed www.reardonmachinery.com

SHOW ROOM: 24577 Redfish Street - Bonita Springs, FL 34134



239-947-0348 Phone
888-842-9455 Toll Free
239-498-1809 Fax

Manufactured By:
CONQUEST INDUSTRIES